

TRT MADE POSSIBLE FLEETGUARD AIR CLEANERS

AIR CLEANER - OPTIAIR






OptiAir™

Innovative Design meets all OEM requirements

- Reduction in system size to fit shrinking engine compartments
- Higher dust holding capacity to extend service intervals
- Two-stage air housing design to extend filter life
- Lower system restriction to deliver maximum engine performance
- Reduced service time to lower maintenance costs
- Secondary element optional

OptiAir™ Flow Rate

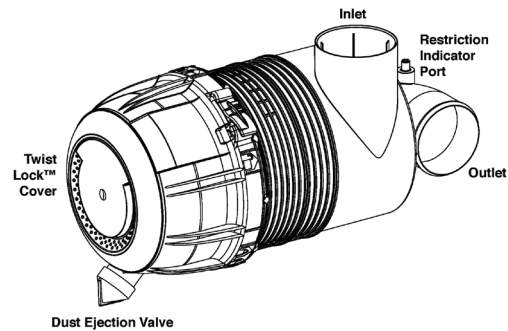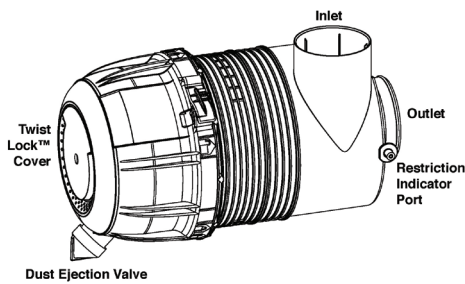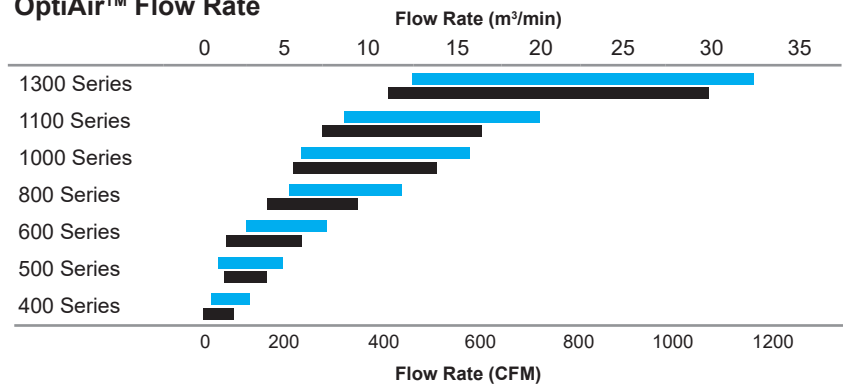

Part No	Series	CFM Range	Primary Element	Secondary Element	Inlet OD mm	Outlet OD mm	Cover OD mm	Length mm	Mounting Band x Qty
AH19485	400	35-92	AF26116		51	51 *	142	189	3918199S x 1
AH19474	400	38-102	AF26116		51	51	142	189	3918199S x 1
AH19482	500	65-112	AF26168	AF26351	76	76	166	284	3918198S x 1
AH19476	600	100-234	AF26117		76	76	194	327	3918196S x 1
AH19260	800	103-300	AF25960	AF25961	102	102	237	368	3918197S x 1
AH19261	800	175-385	AF25960		102	102	237	368	3918197S x 1
AH19333	1100	250-655	AF25962		127	127	309	439	3932495S x 2
AH19334	1100	230-560	AF25962	AF25963	127	127	309	439	3932495S x 2
AH19480	1300	450-1100	AF26124		178	178	356	535	3936445S x 2
AH19481	1300	400-1000	AF26124	AF26125	178	178	356	535	3936445S x 2

Note* AH19485 90° outlet

TIP

To ensure optimum filter performance Fleetguard recommend fitment of 3946326S restriction indicator.